

I2C Fiber Adapter

Manual

(Rev. 1.1)

Coptonix GmbH

Luxemburger Str. 31
D – 13353 Berlin
Phone: +49 – (0)30 – 61 74 12 48
Fax: +49 – (0)30 – 61 74 12 47
www.coptonix.com
support@coptonix.com

INTRODUCTION


The *I2C Fiber Adapter* is bi-directional externally powered I2C to Single Mode Fiber Optic converter. It allows the communication between I2C devices using fiber cables over long distances. The adapter comes with 2-Way Terminal Block for power supply, 3-Way Terminal Block for I2C-Bus and 4 VLink type connectors for fiber optic links.

The adapter is hot-pluggable (plug-and-play) and requires no software or drivers.

SPECIFICATIONS:

Fibre optic	2x TXER VLINK 10MBD 2x RCVR VLINK 10MBD
Wavelength	650 nm
I2C Clock	up to 350kHz
Distance (Fiber Optic)	50m @25°C @100kHz
Power Supply	8-34 VDC
Power Consumption	Typ. 60mA; max. 260mA
Fiber Optic Cables	Single Mode 1mm POF
Connector (Fiber Optic)	4x VLink 2x DUPLEX CONNECTORS or 4x SIMPLEX CONNECTORS
Connector (I2C-Bus)	3-Way Terminal Block
Connector (Power)	2-Way Terminal Block
Dimension [mm]	65 x 35

DIMENSIONS

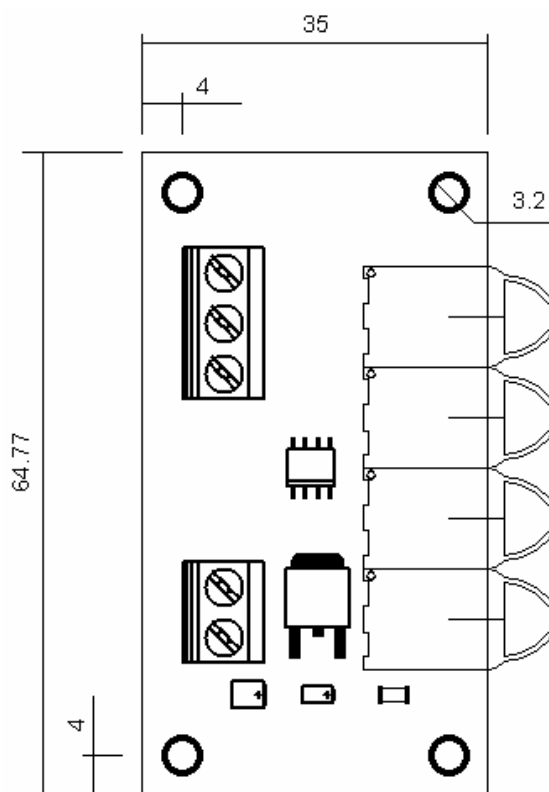

PINOUT CONFIGURATION:

1 I2C-Bus Connector:

3-Way Terminal Block

SDA: I2C Serial Data Line

SCL: I2C Serial Clock Line

GND: Ground

2 Power Supply Connector:

2-Way Terminal Block

GND: Ground

Power: 8 – 34 VDC

3 SDA VLink Connector:

2x Fiber VLink

SDA - RX: Fiber Optic - Serial Data Line Receiver


SDA - TX: Fiber Optic - Serial Data Line Transmitter

4 SCL VLink Connector:

2x Fiber VLink

SCL - RX: Fiber Optic - Serial Clock Line Receiver

SCL - TX: Fiber Optic - Serial Clock Line Transmitter

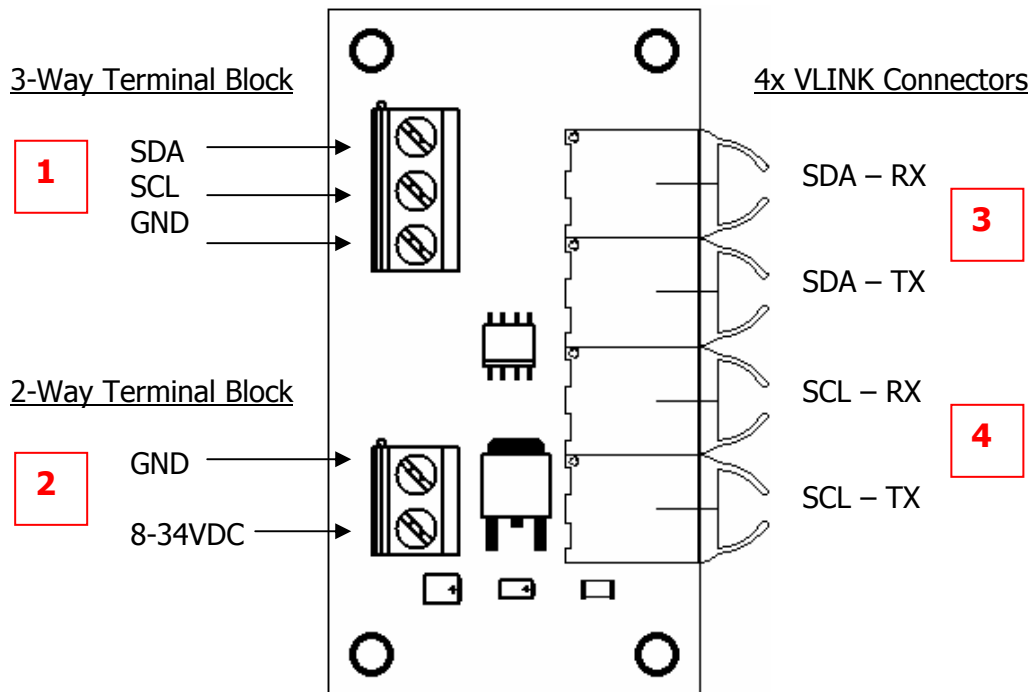

APPLICATIONS

